

Overview

GE Security Fire Alarm Bells are specially designed for fire alarm applications. The gongs are made of selected alloy steel to give the loud, resonant tones necessary in fire alarm systems.

Two gong sizes are available to overcome different ambient noise level.

The Fire Alarm Bells are of the underdome type with heavy duty mechanisms. Each bell is supplied with a mounting plate that fits any standard single-gang opening (see Installation Data). For weather-proof application GE Security offers an optional surface weather-proof back box. Refer to the Specification chart for applicability and cata-log number of the weatherproof back box for the respective bell.

Full Cast Grid — Add Suffix "G" to Catalog Number.

Example: 438DG-6N5.

Note Cat. No 323G type bells are not UL Listed.

Slotted Gong — Add Suffix "S" to Catalog Number.

Example: 438DS-6N5.

Note Cat. No. "S" Suffix Bells are not UL Listed

Finish — Standard gong and housing furnished gray with red label. Optional red finish available. **Add Suffix "R" to Catalog Number.**

FM — 325, 438 and 439 Series Bells shown below are FM approved.

Standard Features

- Vibrating and single stroke
- 4 inch (100mm), 6 inch (150mm), 10 inch (250mm) sizes
- Red or gray finish
- Rugged compact mechanism
- Heavy duty cast housing
- Low power drain
- Wide voltage selection
- Indoor or weatherproof

Fire Alarm Bells



U.S.
T 888-378-2329
F 866-503-3996

Canada
T 519 376 2430
F 519 376 7258

Asia
T 852 2907 8108
F 852 2142 5063

Australia
T 61 3 9259 4700
F 61 3 9259 4799


Europe
T 32 2 725 11 20
F 32 2 721 86 13

Latin America
T 305 593 4301
F 305 593 4300

www.gesecurity.com/est

© 2006 General Electric Company
All Rights Reserved

Installation

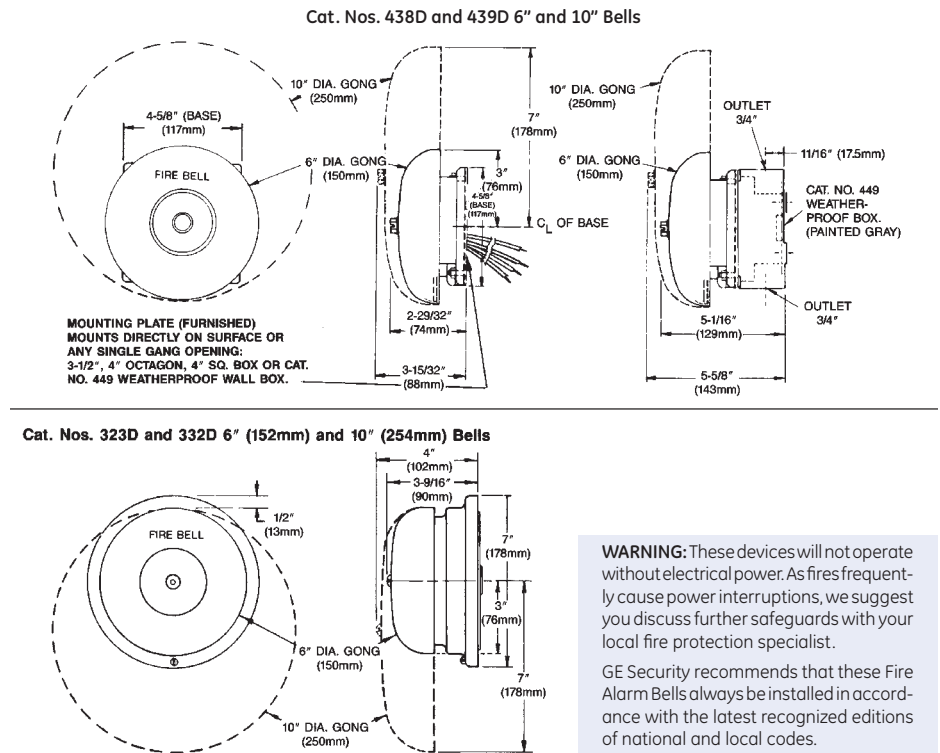

Specifications & Ordering Information

Cat. No.	DB @ 10 ft	Description	Volts	Amps	Leads	Weatherproof Box
323D-10AW-(R)	79	10 inch (250mm) Single Stroke, Diode	20-24 Vdc	0.33	X	N/A
332D-4N5-(R)	78	4 inch (100mm) Single Stroke, Diode	120 Vac	0.13	X	N/A
332D-6N5-(R)	82	6 inch (150mm) Single Stroke, Diode	120 Vac	0.13	X	N/A
332D-10N5-(R)	83	10 inch (250mm) Single Stroke, Diode	120 Vdc	0.17	X	N/A
438D-6N5(R)	76	6 inch (150mm) Vibrating, Diode	120 Vac	0.034	X	449
438D-10N5(R)	88	10 inch (250mm) Vibrating, Diode	120 Vac	0.034	X	449
439D-6AW(R)	83	6 inch (150mm) Vibrating, Diode	20-24 Vdc	0.085	X	449
439D-10AW(R)	86	10 inch (250mm) Vibrating, Diode	20-24 Vdc	0.085	X	449
438D-8N5	86	8" (200mm) Vibrating, Diode	120 Vac	0.034	X	449
439D-8AW	84	8" (200mm) Vibrating, Diode	20-24 Vdc	0.085	X	449



imagination at work